

Serge GS

GS03



SUNESSE®
Sunscreen Finesse

By HanDe

Product Certificate

Fire, Smoke Classification	FR (US) - NFPA 701 TM#1			BS (GB) - 5867 Part2 TypeB								
	B1(CN) - GB8624			M1(F) - NF P 92-507			B1(DE) - DIN4102					
Health & Safety	Oeko-tex Standard 100 class IV						Greenguard® Gold					
	RoHS Directive (EU)2015/863						EN71 Part 3:1994					
	AATCC112-2014						GB18586 - 2001					
Bacterial & Fungal Resistance	ASTM G21-15		0 Grade		None fungi growth							
	ASTM E 2180-07		Reduce more than 99.9% of bacteria									
Colour fastness to light	Grade 8		ISO105 B02:2014									
	≥4.0		AATCC TM 16.3-2014; Option 3; Xenon Arc Lamp									
Warranty	5 Years											




Technical Data

STYLE		Serge GS03
Composition		36% Fibreglass 64% PVC
Openness Factor		≈3%
UV Screen		Up to 97%
Width	inch	98"–118"
	cm	250–300
Weight	oz/yd ²	18.13±5%
	(ISO 2286–2) g/m ²	615 ± 5%
Thickness	inch	0.034 ± 5%
	(ISO 2286–3) mm	0.87 ± 5%
Mechanical		Resistance
Breaking	Warp	≥2500 N/5cm
	Weft	≥2000 N/5cm
Tear	Warp	≥145 N
	Weft	≥135 N
Packing		32.8 yards
(Roll Length)		30 lm

Openness Factor

0107 White * Sand

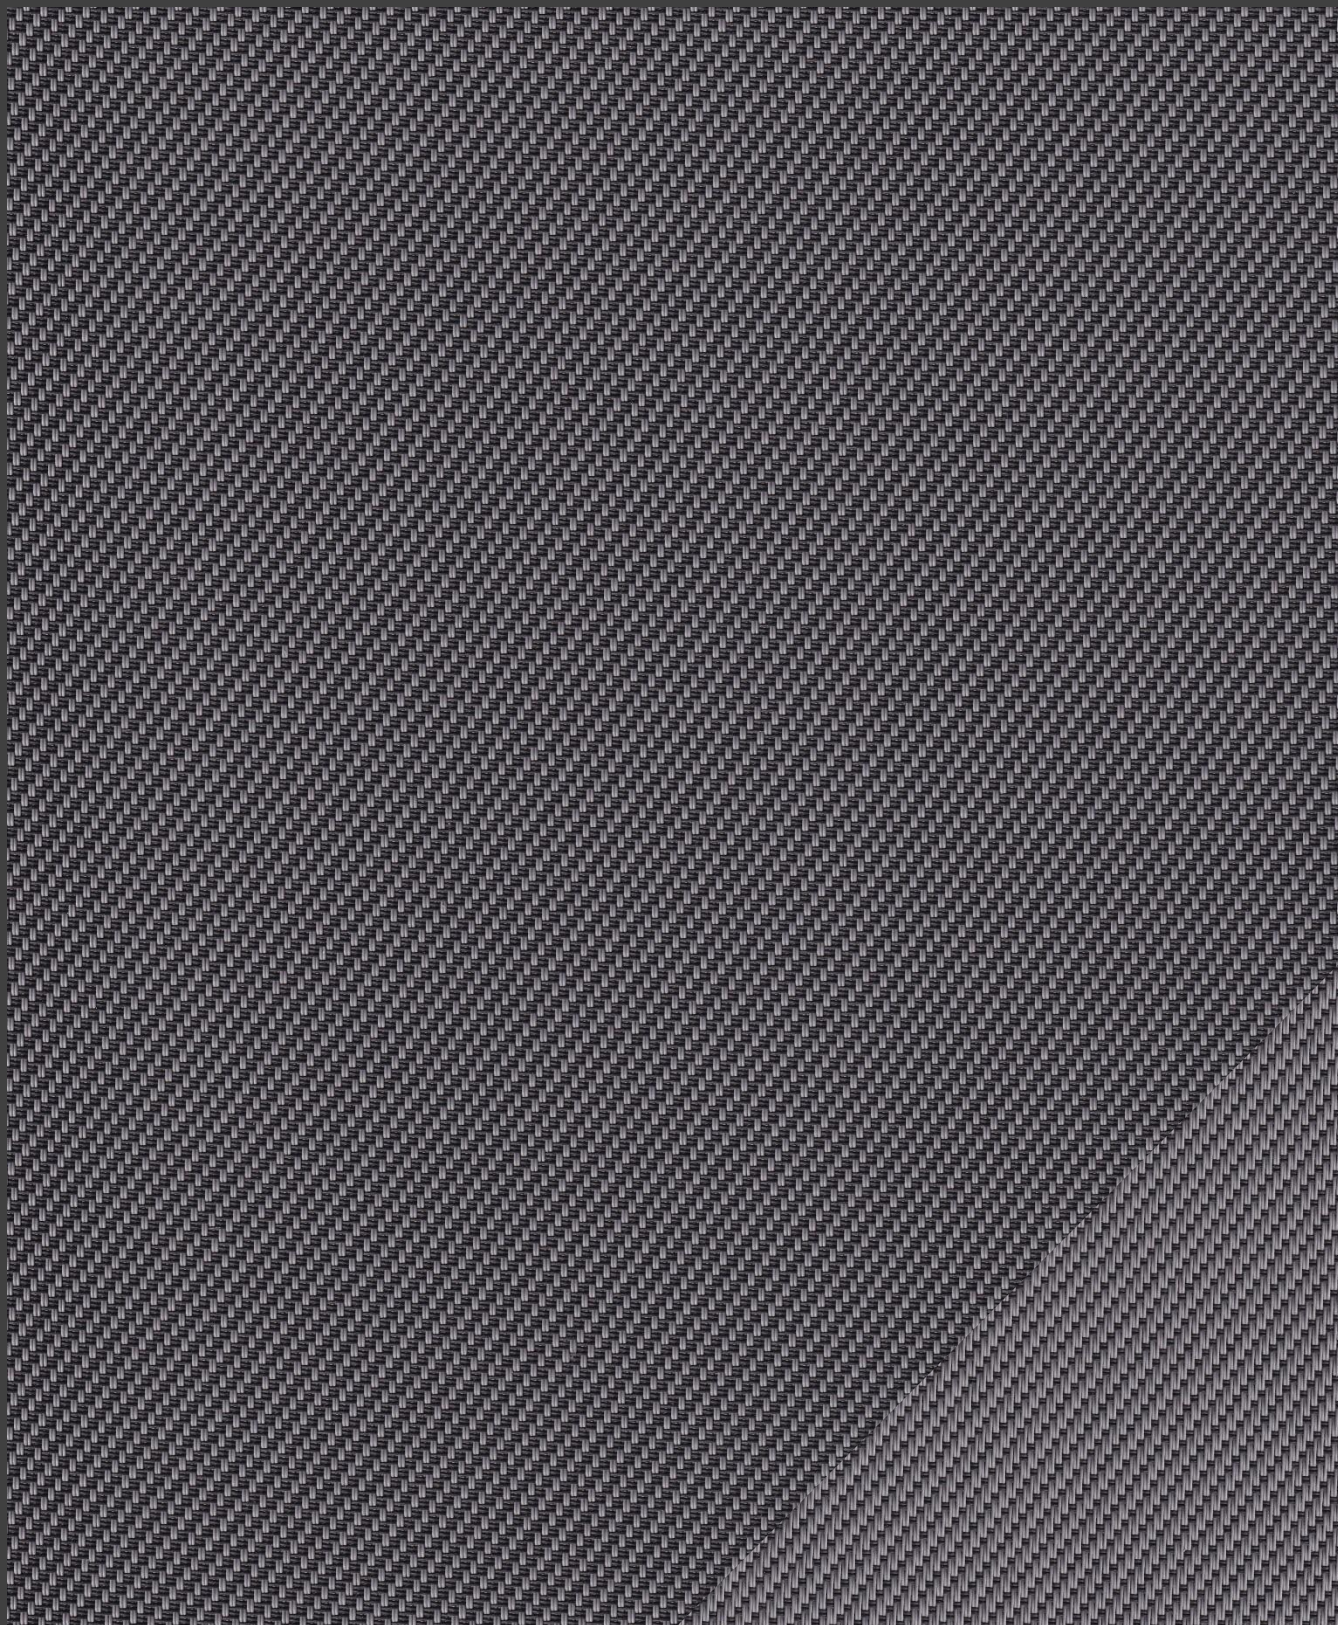


Serge GS 3%

Openness Factor may be slightly different from the actual ones

Colours


Serge GS 3%

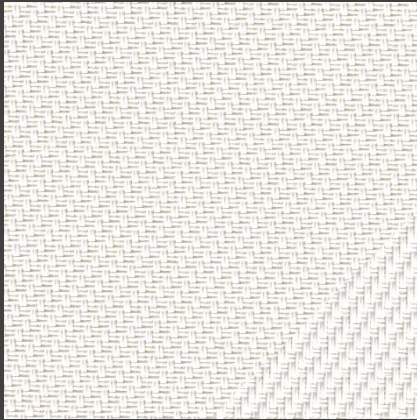


0101 White * White



0102 White * Linen

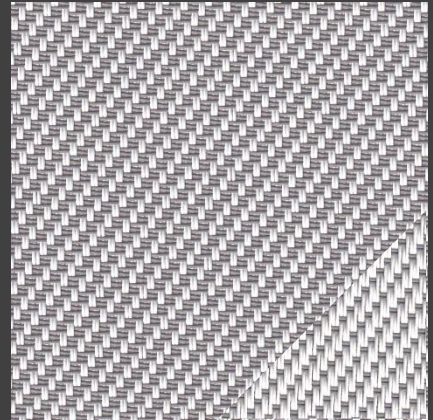


0105 White * Grey

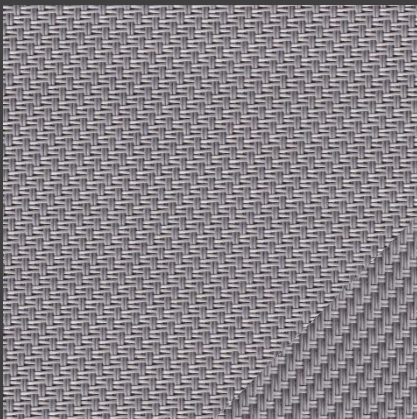

0503 Grey * Pearl



0504 Grey * Black

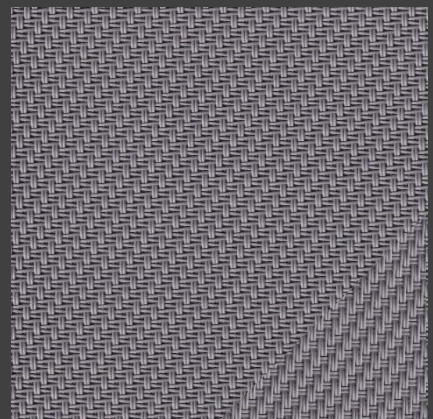

0505 Grey * Grey



0509 Grey * Blue

* Colours may be slightly different from the actual ones



Hande®

Hande Manufacturing(China)Co.,Ltd

Add: No.161, Yao TianHe Street,Yong shun Avenue,Yonghe Economic Zone,
GZ Economic&Technological Development District, Guang zhou, China
Tel: 86-20-32222888 Fax: 86-20-32222205 PostCode: 511356
Mail: info@handegroup.com.cn



www.handegroup.com.cn