

Twill GT

GT1 / GT3



SUNESSE®
Sunscreen Finesse

By HanDe

Product Certificate

Fire, Smoke Classification	FR (US) - NFPA 701 TM#1			BS (GB) - 5867 Part2 TypeB		
	B1(CN) - GB8624			M1(F) - NF P 92-507		B1(DE) - DIN4102
Health & Safety	Oeko-tex Standard 100 class IV			Greenguard® Gold		
	RoHS Directive (EU)2015/863			EN71 Part 3:1994		
	AATCC112-2014			GB18586 - 2001		
Bacterial & Fungal Resistance	ASTM G21-15	0 Grade	None fungi growth			
	ASTM E 2180-07	Reduce more than 99.9% of bacteria				
Colour fastness to light	Grade 8	ISO105 B02:2014				
	≥4.0	AATCC TM 16.3-2014; Option 3; Xenon Arc Lamp				
Warranty	5 Years					



Technical Data

STYLE		GT1	GT3
Composition		31% Fibreglass	31% Fibreglass
		69% PVC	69% PVC
Openness Factor		≈1%	≈3%
UV Screen		Up to 99%	Up to 97%
Width	inch	98"—118"	98"—118"
	cm	250—300	250—300
Weight	oz/yd²	16.95±5%	16.06 ± 5%
	(ISO 2286—2)	g/m²	575 ± 5%
Thickness	inch	0.034 ± 5%	0.033 ± 5%
	(ISO 2286—3)	mm	0.87 ± 5%
Mechanical	Resistance		
Breaking	Warp	≥1200 N/5cm	≥980 N/5cm
	Weft	≥ 750 N/5cm	≥770 N/5cm
Tear	Warp	≥165 N	≥60 N
	Weft	≥125 N	≥55 N
Packing		32.8 yards	32.8 yards
	(Roll Length)	30 lm	30 lm

Thermal and Optical Factors

Color	Side	Fabric Properties					Fabric & Glass	
		Thermal			Optical		SHGC % Improvement	SHGC
		Ts	Rs	As	Rv	Tv		

Recommended Comfort Classification				
Thermal Control	Visual			
	Daylight Utilization	Glare Control	Night Privacy	Outward Visibility

Nova Twill 1%

0101 White*White	A	17	66	17	73	14	55%	0.22
0102 White*Linen	A	15	63	22	68	11	52%	0.22
	B	15	57	28	60	11	46%	0.24
0104 White*Black	A	7	47	46	47	6	42%	0.27
	B	9	22	69	32	8	30%	0.29
0105 White*Grey	A	11	54	35	60	7	47%	0.23
	B	11	36	53	38	7	33%	0.29

2	2	1	2	0
2	2	1	2	1
2	1	3	2	2
2	1	2	2	1

Nova Twill 3%

0101 White*White	A	19	64	17	71	16	53%	0.23
0102 White*Linen	A	19	63	18	67	13	53%	0.23
	B	17	62	21	59	13	45%	0.25
0104 White*Black	A	8	43	49	34	7	39%	0.27
	B	9	20	71	8	8	27%	0.29
0105 White*Grey	A	15	48	37	57	7	45%	0.24
	B	11	52	37	36	7	31%	0.30

2	2	1	2	0
2	2	1	2	1
2	1	2	2	2
2	1	1	2	1


Ts (Solar transmittance): Proportion of solar energy transmitted through the fabric. Rs (Solar reflectance): Proportion of solar radiation reflected by the fabric. As (Solar absorptance): Proportion of solar radiation absorbed by the fabric. Tv (Visible light transmittance): Total percentage of light radiation through the fabric over a wavelength of 380 to 780 nm. Rv (visible light reflectance): Total percentage of light radiation reflected by the fabric over a wavelength of 380 to 780 nm. SHGC (Total solar factor): Solar energy which actually penetrates into a room through the blind and glazing. A low value means good thermal performance.

Comfort Classification According to EN14501 : 0. Very little effect 1. Little effect 2. Moderate effec 3. Good effect 4. Very good effec


Openness Factor

0104 White * Black

GT 1%

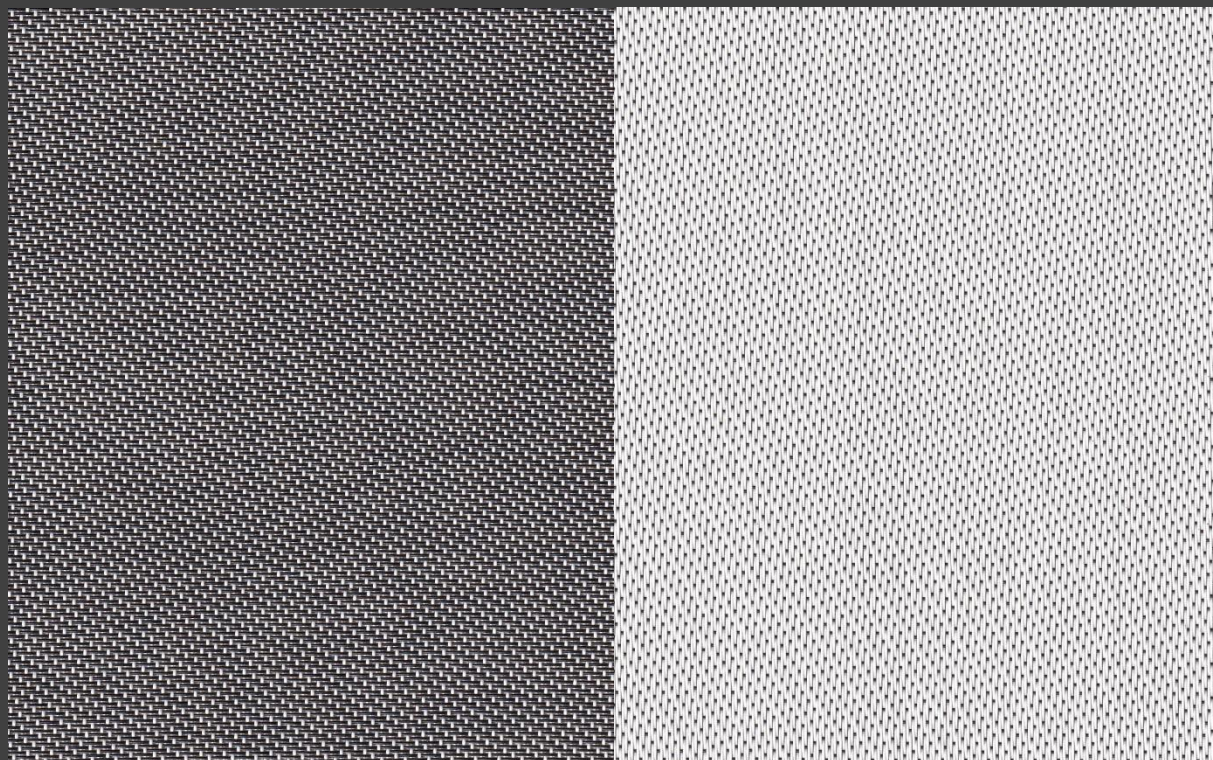


GT 3%

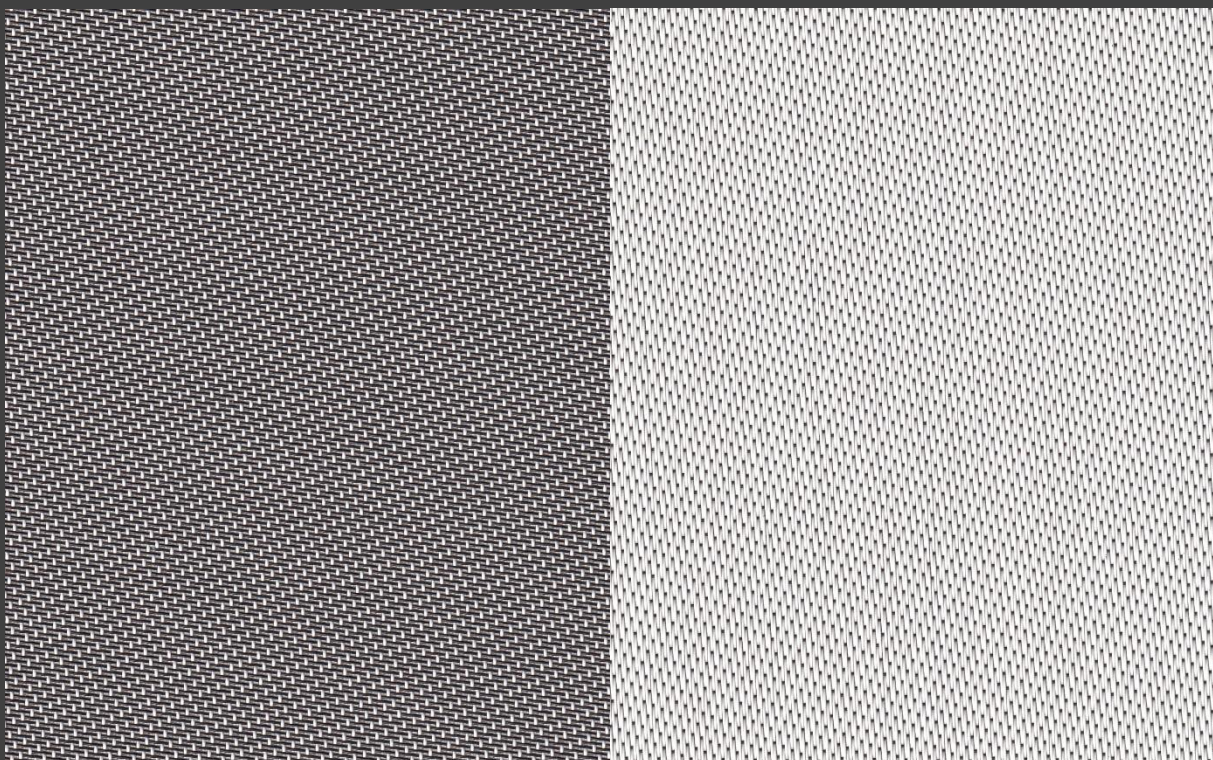

Openness Factor may be slightly different from the actual ones

Colours


GT 1%

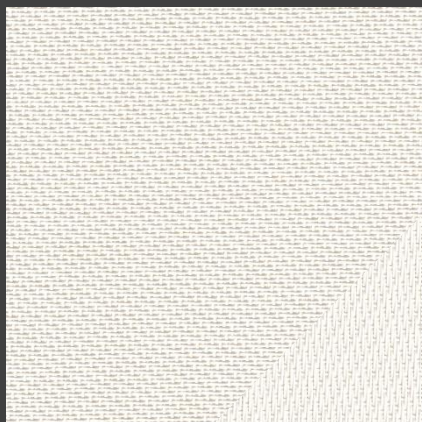


0101 White * White



0102 White * Linen

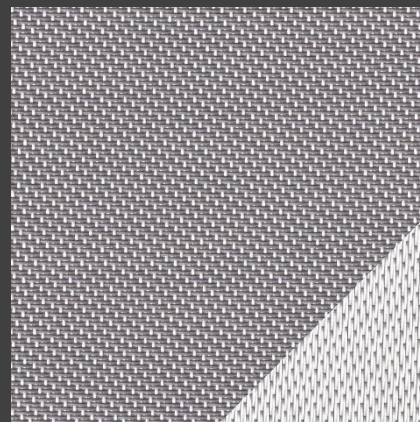

0105 White * Grey

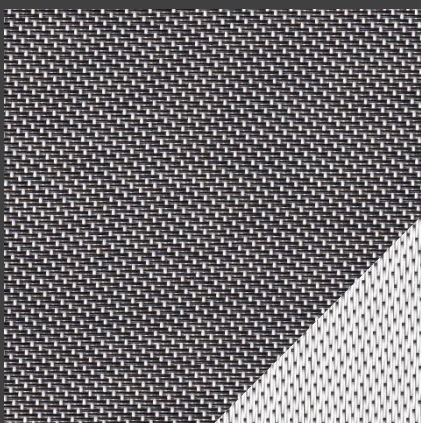

0104 White * Black



Hande®

Hande Manufacturing(China)Co.,Ltd

Add: No.161, Yao TianHe Street,Yong shun Avenue,Yonghe Economic Zone,
GZ Economic&Technological Development District, Guang zhou, China
Tel: 86-20-32222888 Fax: 86-20-32222205 PostCode: 511356
Mail: info@handegroup.com.cn



www.handegroup.com.cn